

# **Edge plasma effects in ITER-type TOKAMAK caused by an enhancement of DD/DT reaction in metals at high current- low energy deuteron bombardment**

---

Andrei G. Lipson

Institute of Physical Chemistry and  
Electrochemistry, Russian Academy of  
Sciences, Moscow, 119991, Russia

7-th International Workshop, Asti  
09/23-25, 2006



## Introduction I- Expected Sources of Radiation Corrosion of First Wall

---

- First wall/divertor of TOKAMAK is bombarded by intensive beams of keV charged particles ( $d^+$ ,  $t^+$ ,  $He^{4++}$ ,  $He^{3++}$ ) resulting in sputtering/erosion.
- ITER materials are bombarded by high intensity 14 MeV neutrons from DT reaction caused bulk radiation damage.



## Introduction II- Possible LENR contribution to First Wall damage

---

- LENR effects could also affect the processes at the first wall and divertor of TOKAMAK. Now LENR are not taken into account as a possible source of radiation damage in thermonuclear reactors .
- What kind of LENR effects may potentially to destroy the first wall ?
- DD/DT reaction enhancement producing excessive energetic He-4 and He-3 (blistering).
- Low energy He<sup>4</sup> from DD reaction (if any in W or St. steel) diffusing into the bulk.
- Soft X-ray deposition at the metal surface – sputtering increase



## Enhancement of DD-reaction in metal targets at low deuteron energy ( $1.0 < E_d < 10$ keV)


---

- Most metals show enhancement of DD-reaction yield at  $E_d \ll 10$  keV compared to the standard yield obtained by extrapolation of the DD-reaction cross-section to these  $E_d$  (see accelerator experiments: F. Raiola et al., Nuclear Physics, A719, 61C (2003), J. Kasagi et al., J. Phys. Soc. Jpn., **71**(12), 2881 (2002)).
- Recently, high-current glow discharge measurement showed strong enhancement of DD-yield – about 9 orders of magnitude at  $E_d = 1$  keV in Ti target (A. Lipson et al., JETP, **100**, 1175 (2005)).



## Comparison of High Current- Low Energy D<sup>+</sup> Accelerator and Pulsed GD parameters

| Parameter                    | I, range      | E <sub>d</sub> (lab),<br>keV,<br>range | W <sub>max</sub> ,<br>[W] | P, mm Hg                       | T,K,<br>target | E(D <sup>+</sup> )<br>spread |
|------------------------------|---------------|--|---------------------------|--------------------------------|----------------|------------------------------|
| *High Current<br>Accelerator | 10-400<br>μA  | 100.0- 2.5                             | 2.0                       | 5×10 <sup>-7</sup> ,<br>vacuum | 100-350        | ± 1.0%                       |
| **Pulsed Glow<br>Discharge   | 100-600<br>mA | 2.5- 0.40                              | 200.0                     | 2.0-10.0,<br>D <sub>2</sub>    | 200-1000       | ±<br>10.0%                   |




# Comparative parameters of the edge plasma flux (ITER) and high-current glow discharge

---

- ITER/DEMO: power deposition at the first wall  $W \sim 1$  kW/cm<sup>2</sup>; at ion temperature  $T_i \sim 0.5$ -1.0 keV, the flux of bombarding ions with the energy  $E_i \sim 1.0$ -2.0 keV would be  $J_i \sim 0.5$ -1.0 A/cm<sup>2</sup>,  $T \geq 800$  K
- High current pulsed glow discharge (PGD) in D<sub>2</sub> at  $p \sim 0.5$ -9.0 mm Hg: pulses 0.2-1.0 ms duration (rising time  $< 1.0$   $\mu$ s),  $E_d \sim 0.5$ -2.5 keV,  $J \sim 0.2$ -2.0 A/cm<sup>2</sup>.
- The disadvantage of a larger energy spread in the PGD case, is outweighed by the higher current and lower voltage capability.
- This GD might well simulate the edge-plasma effects at the first wall of ITER.

# Pulsed Glow discharge set up

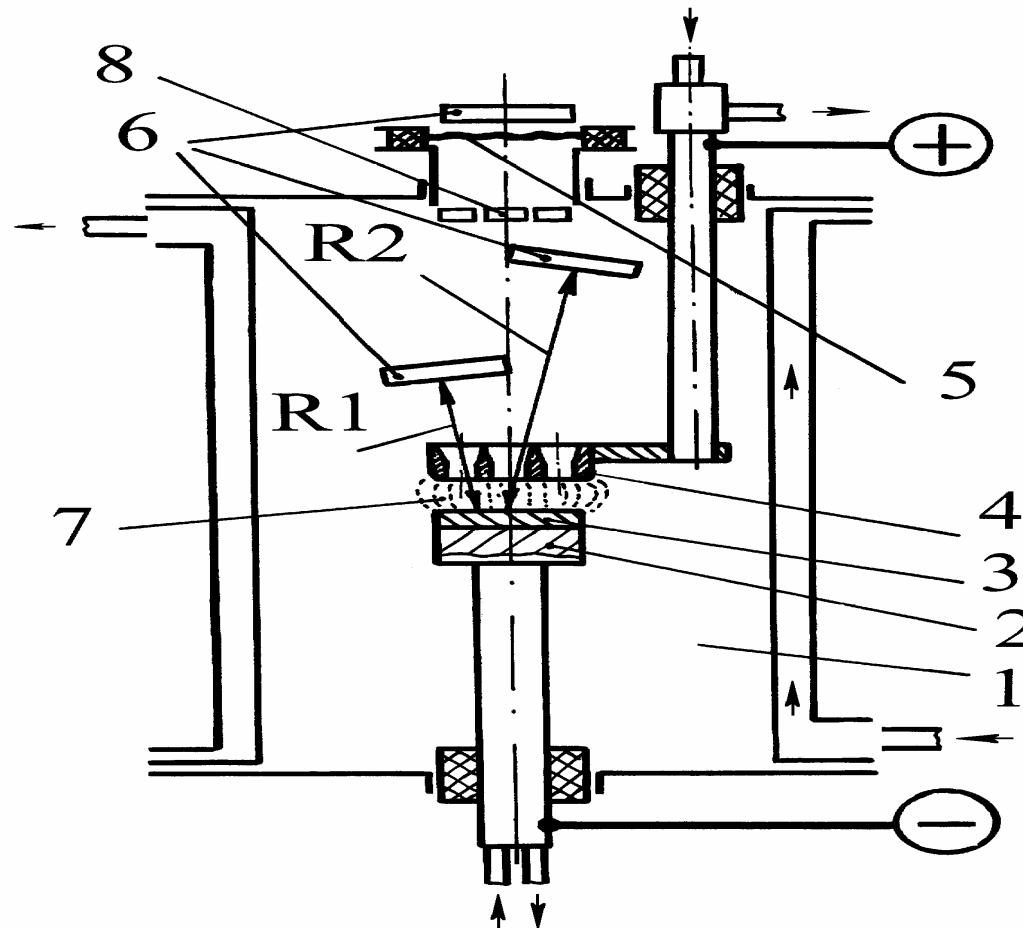

7-th International Workshop, Asti  
09/23-25, 2006



## Thick target yield and enhancement of DD-reaction

---

Thick target yield: All deuterons are stopped in the target:  $R(E_d) < h(\text{Target})$

$$Y_t(E_d) = \int N_D(x) \sigma(E_{\text{lab}}) (dE/dx)^{-1} dE$$

$N_D(x)$  - D concentration in target,

$\sigma(E_{\text{lab}})$  - cross section at  $E_{\text{lab}}$ ,


$dE/dx$  – stopping power in target

Enhancement factor:


$$f(E) = Y_p(E)/Y_b(E) = \exp[\pi\eta(E)U_e/E]$$

$Y_p(E)$  – experimental yield at  $E=E_d$ ,  $Y_b(E)$  – bare yield,  $2\pi\eta(E) = 31.29 Z^2(\mu/E)^{1/2}$ ,  $U_e$  - screening potential of deuterons in target.


# Yields of 3.0 MeV protons before and after normalization to deuterium concentration in PGD with Ti cathode

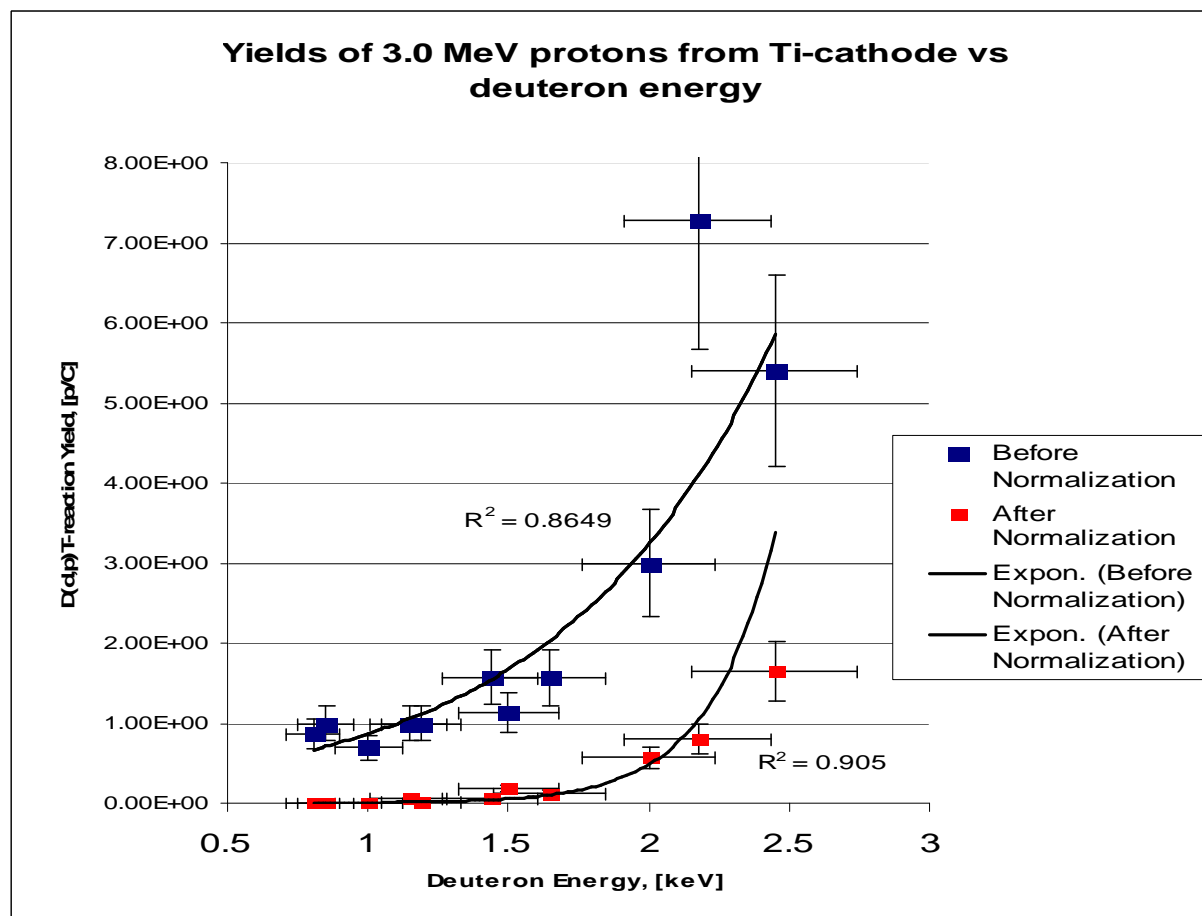


# Normalization of PGD 3.0 MeV proton yields to that of 2.45 keV

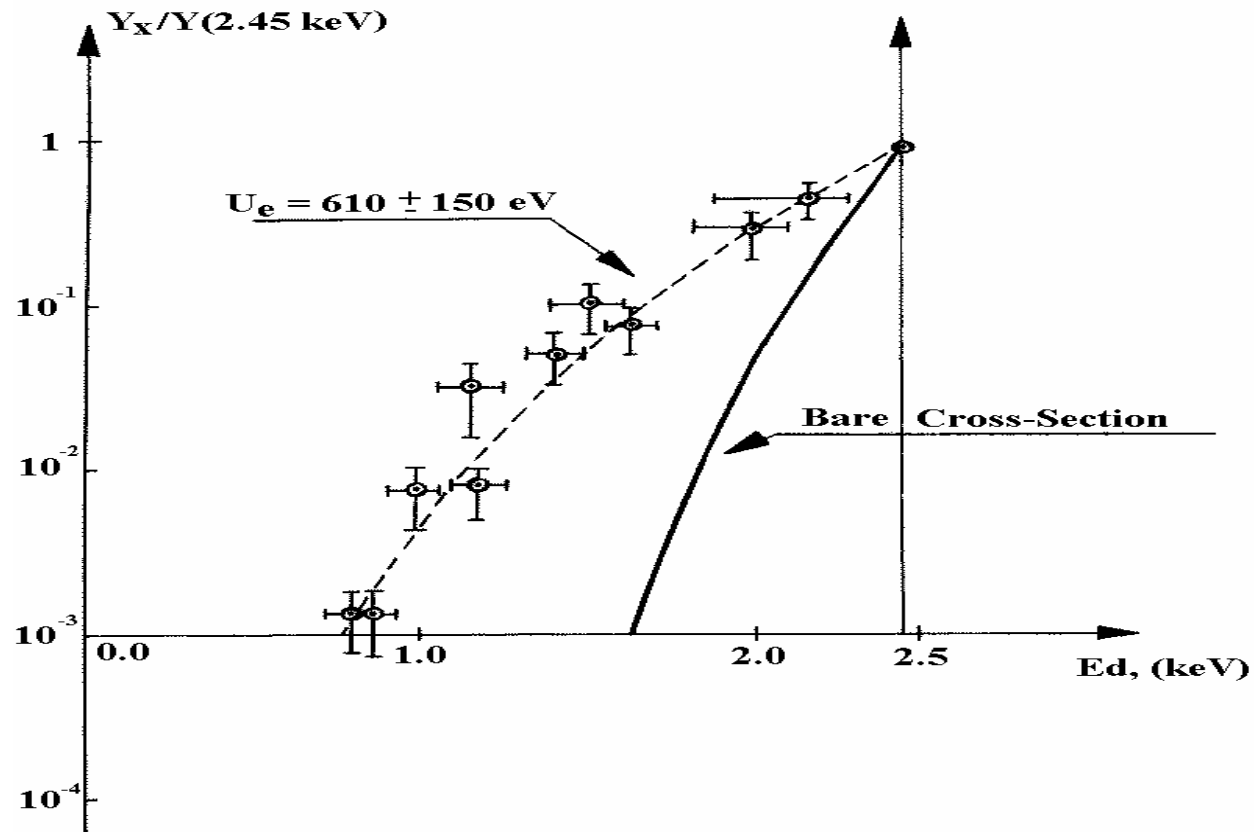

DD-reaction enhancement factor ( $f(E) = Y_p(E)/Y_b(E) = \exp[\pi\eta(E)U_s/E]$  for Ti-target: (1)-accelerator; (2)-PGD

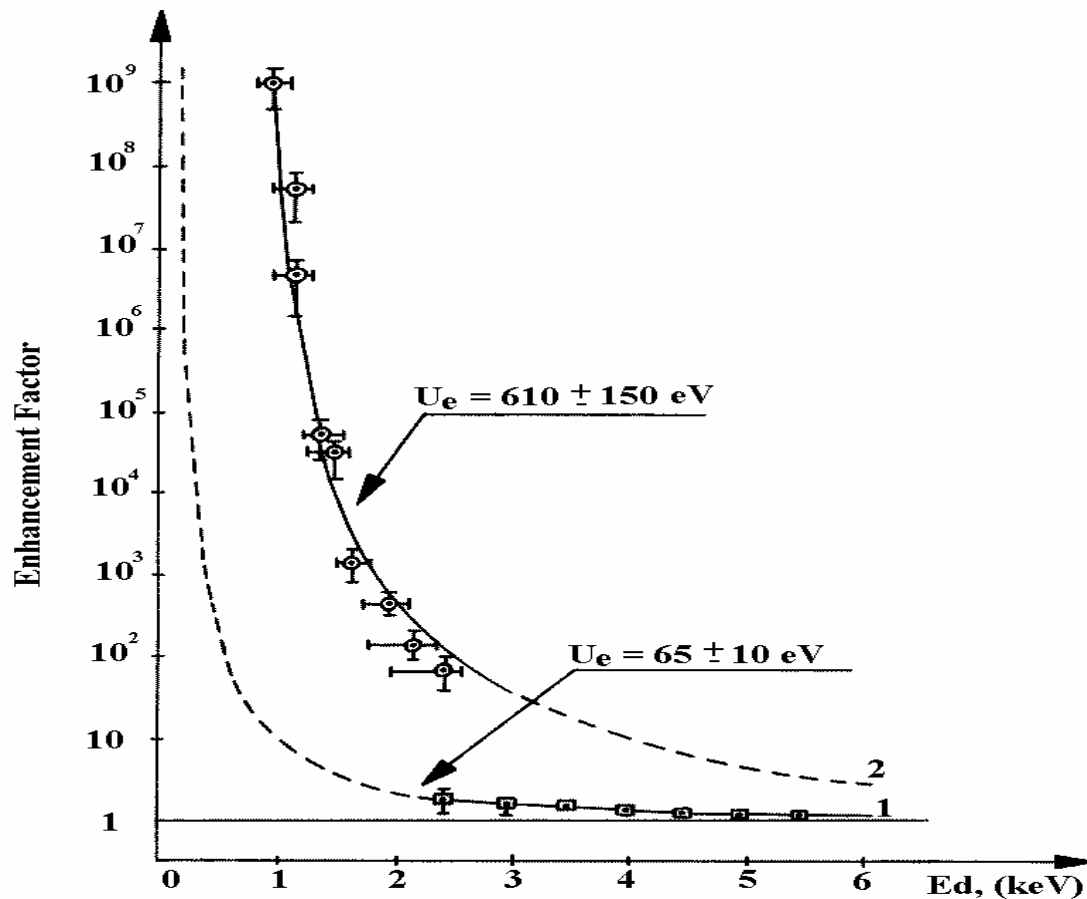


Thick target yields for accelerator (Ti and Au)  
and PGD (Ti) normalized to that at  $E_d = 10$   
keV compared to bare yield (solid line)

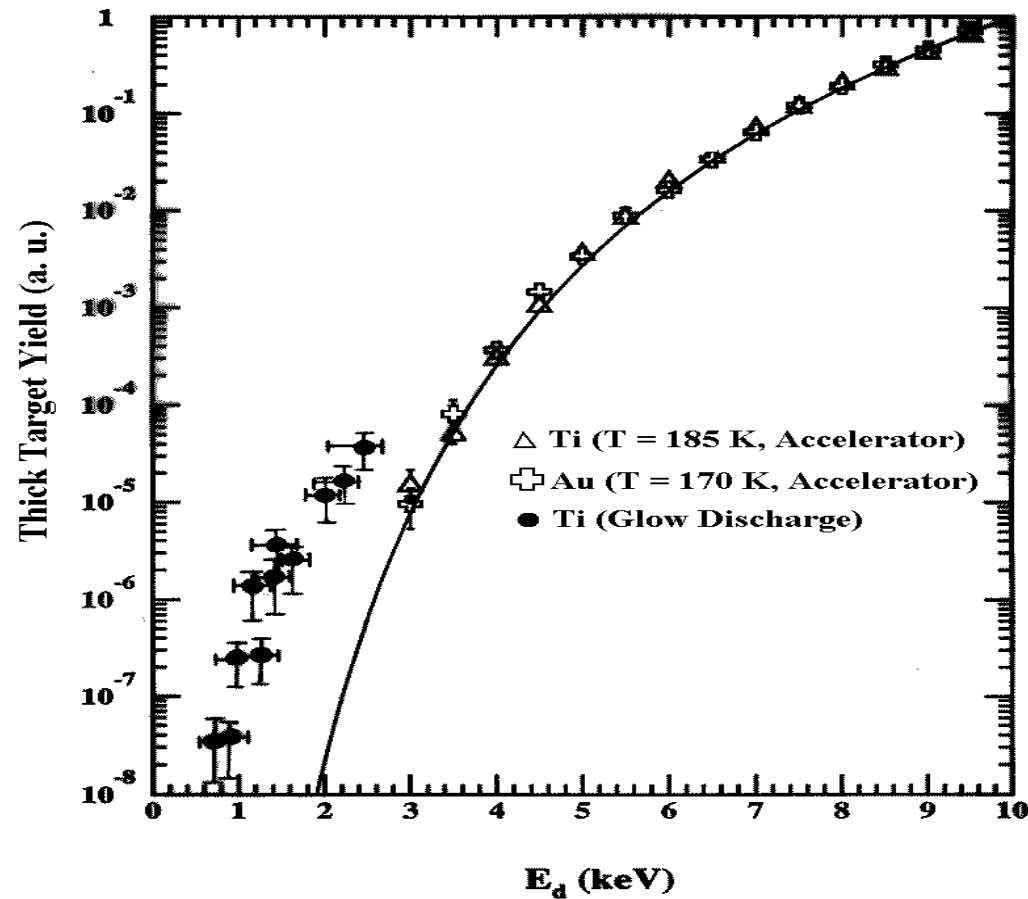


# DD-reaction enhancement in Ti target depending on deuteron current and target temperature.


| Target/Ref                        | D <sup>+</sup> - energy<br>$\Delta E_d(\text{lab})$ ,<br>[keV] | $\langle I_d \rangle$ , [mA] | T, [K]  | $U_e$ , [eV]  | Fit:<br>$U_e = 68.23 \ln I_d + 219.9$ [eV] |
|-----------------------------------|--|------------------------------|---------|---------------|--|
| Ti,<br>accelerator,<br>Raiola     | 5.0-30.0   | 0.054                        | 290     | $\leq 30$     | 20.7                                       |
| Ti -<br>accelerator,<br>Kasagi    | 2.5-10.0   | 0.13                         | 200     | $65 \pm 15$   | 75.2                                       |
| Ti -<br>GD,<br>Lipson-<br>Karabut | 0.8-2.45   | 310                          | $> 700$ | $610 \pm 150$ | 609.2                                      |

Screening potential in Ti target is a logarithmic function of the bombarding deuteron flux  $F$ :  $F = J \sim y=Me/D$

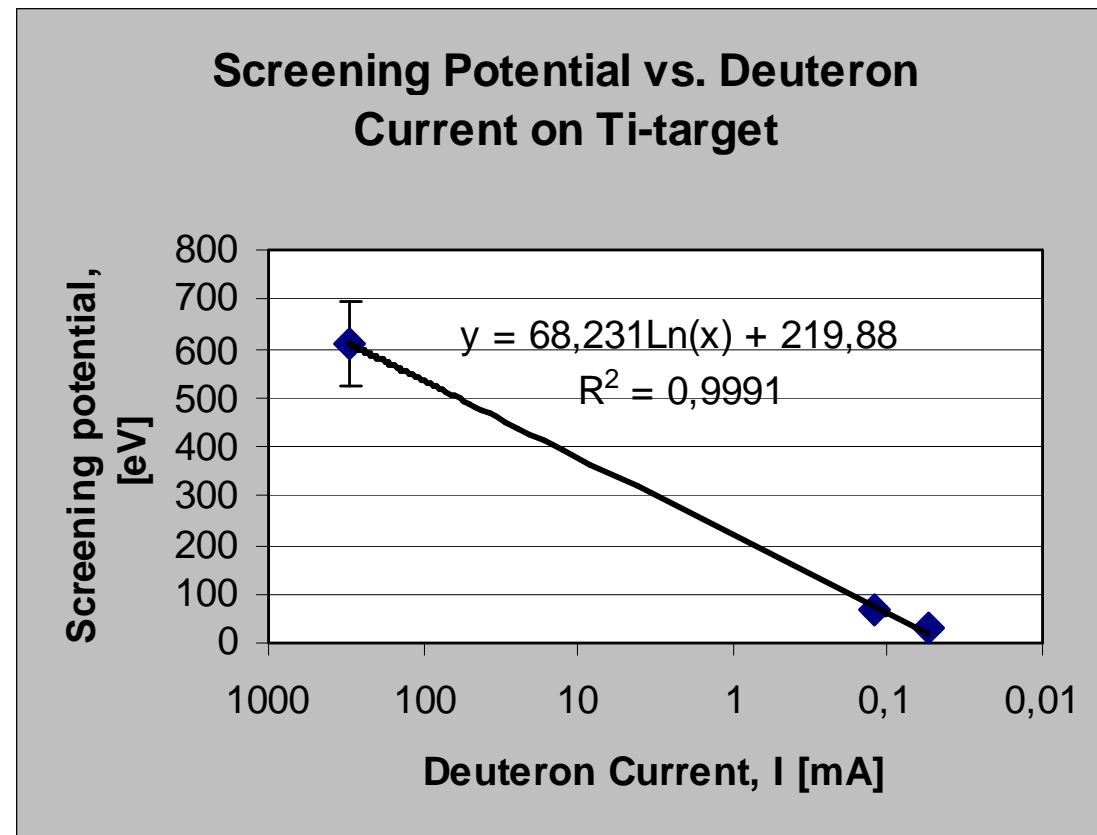

Data are taken from F. Raiola et al, Europhys. J.A**19**, 283 (2004) at  $T_0=290\text{K}$ ,  $J_0=0.03\text{mA/cm}^2$ ,  $E_d \geq 5\text{keV}$ .  
 Points are consistent with increase in  $y = \text{Me/D}$ : Hf, Y, Lu, Sc, Gd, Tm, Ti, Ce, Yb, Sm, Zr, Er, Pr, Eu, Ho, La, Ge, C, W, Sr, Ir, Ba, Ru, Au, Ag, Re, Ni, Nb, Ta, Zn, Bi, Mo, Mn, Mg, Cu, Rh, Fe, Pt, V, Pb, Pd, In, Tl.

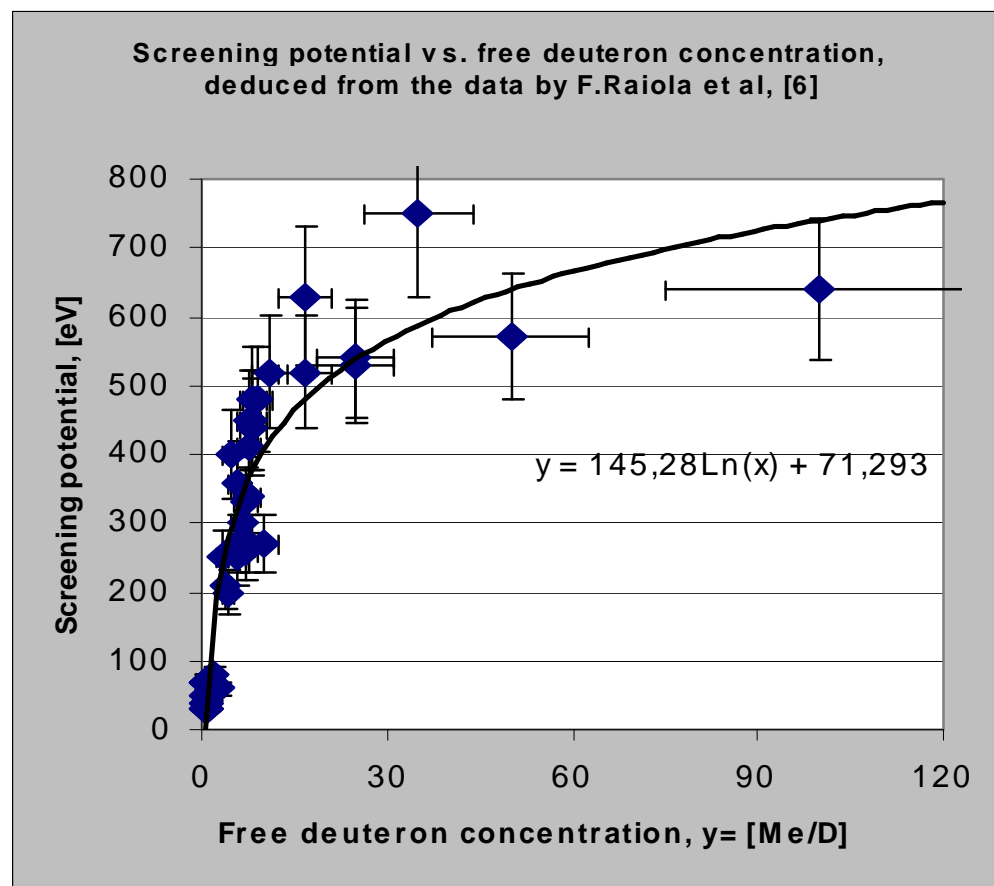



$U_e = (T/T_0)^{-1/2}[a \ln(y) + b]$ - semi empirical equation for screening potential vs. free deuteron concentration  $y$  ( $a$  and  $b$  are numerical constants)

---

- $y = k \times y_0(J/J_0)$ , where  $y_0 = \text{Me/D}$  at  $T_0 = 290\text{K}$  and  $J_0 = 0.03 \text{ mA/cm}^2$ ,  $k = \exp(\varepsilon_d \Delta T / k_B T T_0)$ ,  $\varepsilon_d$ -activation energy of  $\text{D}^+$  escape from the surface,  $\Delta T = T - T_0$  and  $k_B$ - Boltzman constant.
- Accordingly the equation for  $U_e$ , in ITER case at  $J = 1.0 \text{ A/cm}^2$  and  $T = 773 \text{ K}$ ;
- For tungsten:  $y_0(\text{W}) = 3.45$ ,  $\varepsilon_d(\text{W}) = 0.05 \text{ eV}$ ;  $U_e(\text{W}) = 1200 \text{ eV}$ . Enhancement:  $f_{\text{DT}}(2 \text{ keV}) \sim 1.2 \times 10^4$ ;
- For iron:  $y_0(\text{Fe}) = 16.7$ ,  $\varepsilon_d(\text{Fe}) = 0.06 \text{ eV}$ ,  $U_e(\text{Fe}) = 1350 \text{ eV}$ . Enhancement:  $f_{\text{DT}}(2 \text{ keV}) \sim 4 \times 10^4$ .



## Rough estimate of DT-reaction intensity at the surface of W and Fe in ITER's First Wall:

---

- $$I_{DT} = J_d N_{eff}(T) \times \int_0^{E_d} f(E) \sigma_{DT}(E) (dx/dE) dE$$
- Here  $J_d$  – deuteron current density;  $N_{eff}(T)$  – effective concentration of bounded D/T in metal at temperature  $T$ , captured at depth  $x$ :  $(N_{eff}(T) = N_0 \exp(-\varepsilon_d \Delta T / k_B T T_0))$ , where  $N_0$  – D/T concentration at  $T_0 = 290$  K;  $f(E)$  – enhancement factor;  $\sigma_{DT}$  – is the bare DT- cross-section;  $dE/dx$  – is the stopping power in target calculated with Monte-Carlo code SRIM (J.F. Ziegler and J.P. Biersack, code SRIM 2003)




## Numerical integration results

---

- Taking into account hypothetical First Wall bombardment parameters:  $J_d = 1.0 \text{ A/cm}^2$ ,  $\langle E_d \rangle = 2.0 \text{ keV}$ ,  $T \approx 773 \text{ K}$  and screening potentials  $U_e(W) = 1200$  and  $U_e(\text{Fe}) = 1350 \text{ eV}$ , rough  $d(t, n)\alpha$ -reaction rate at the reactor's edge would be:  $I_{DT} \approx (1-2) \times 10^4 \text{ s}^{-1}\text{-cm}^{-2}$ .
- During one year of operation: DT-reaction alpha fluence  $\Phi_\alpha \sim 7 \times 10^{11} / \text{cm}^2$  or up to  $N_{4\text{He}} \approx 10^{15} \text{ cm}^{-3}$  atoms over depth  $\lambda \sim 6 \text{ }\mu\text{m}$  for 3.6 MeV alphas from dt-reaction.

X-ray yield per deuteron increases exponentially  
with the applied deuteron current at  $E_d \sim 1.5$ -  
2.0 keV

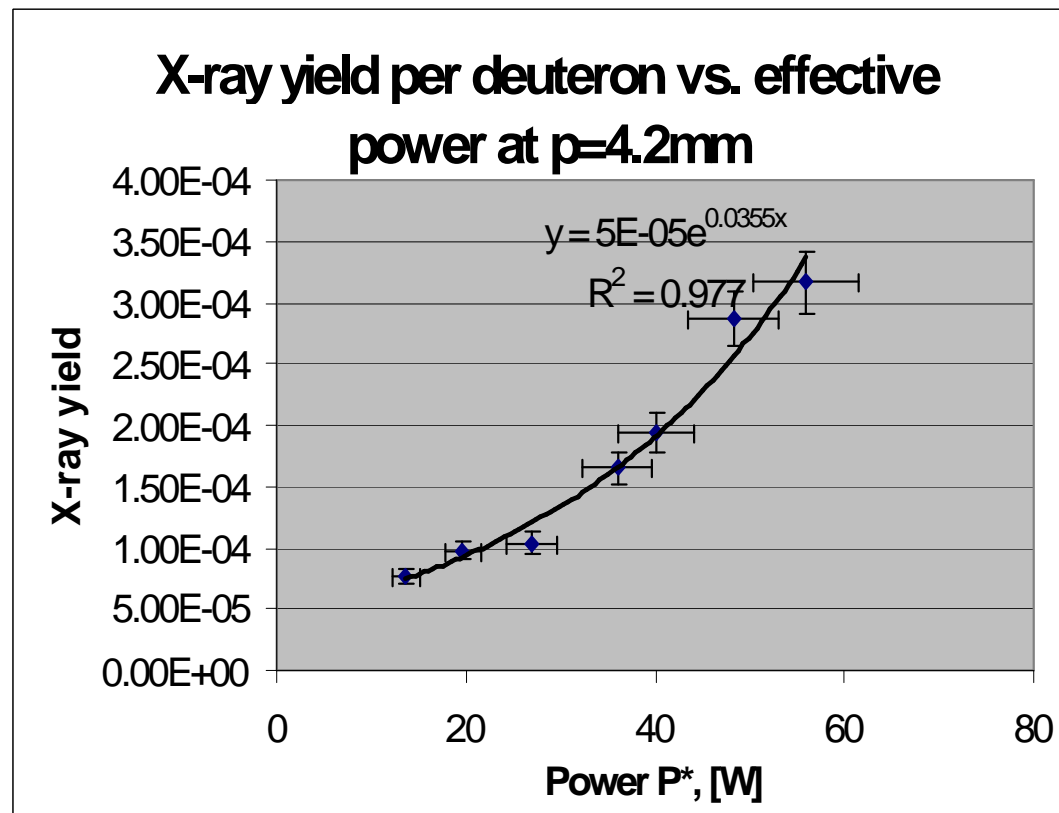



## Possible Consequences of DD/DT- Reaction Enhancement and X-ray Generation at High Current Low Energy Deuteron Bombardment I

---

- Vacancy generation over near-surface layer of reactor's edge by MeV alphas.
- The He-atom precipitation along dislocations or capturing by dislocation atmosphere.
- Additional stress and blistering, plasticity reduction even at low level ( $\sim 10^{15} \text{ cm}^{-3}$ )  $^4\text{He}$  accumulation.
- Sputtering rate may also increase due to vacancy generation and soft X-ray absorption at the First Wall surface



## Consequences II

---

- Reduction in plasticity (e.g. in W) due to the He-4 capture would cause a micro-crack generation over intermediate area between surface and the bulk (1-10  $\mu\text{m}$  depth). Enhancement of First wall fracture and shortening of ITER/DEMO operation time.
- Intense soft X-ray emission at the surface may also enhance erosion of first wall caused by X-ray energy deposition in the near-the-surface layer during charged particle bombardment.



## Conclusions

---

- The edge plasma effects at the first wall, including corrosion, would be partially underestimated because the enhancement of DD/DT reaction and accompanying radiation processes at very low deuteron energy are neglected.
- The high current pulsed GD with appropriate cathode materials (W, St. steel) could be a suitable instrument to simulate edge plasma effects at ITER's first wall.